



TM8110/TM8115 CONVENTIONAL MOBILE RADIOS

The TM8110 and TM8115 are robust, software-flexible radios which are ideal for a wide range of voice and data applications. The TM8110 comes with 10 conventional channels and one-digit display. The TM8115 comes with 100 conventional channels and two-digit display.

Intuitive interface

- Easy-to-read display for fast channel selection
- Four programmable function keys
- Heavy duty microphone and built-in loudspeaker

Flexible communications

- Data capable - supports 1200/2400 baud FFSK as standard
- Internal high speed data modem - software option
- Four RF power levels
- Full Selcall functionality
- DTMF encoder
- Low stand-by power consumption
- MDC 1200 Encode - software option

Advanced system integration capabilities

- Multiple auxiliary ports
- Expansive internal options area
- Direct Connect GPS

Engineered to be tough

The TM8110 and TM8115 meet stringent reliability specifications, including MIL-STD 810 C, D, E, F and IP54.

Software feature upgrades

The Software Feature Enabler (SFE) allows users to upgrade with additional functionality at any stage by simply purchasing the appropriate software license key.

Improved data integrity


The application of Digital Signal Processor (DSP) technology optimises RF performance and ensures fast and reliable data processing.

Ease of integration

The system integrator has maximum design flexibility with multiple ports for auxiliary connectors and a large options board area. The comprehensive third party developer's kit provides integrators with hardware and software tools to facilitate customisation.

AVL support

The TM8110 / TM8115 support a standard polling vehicle location format and a direct connect port for an external GPS receiver - allowing for the development of a complete AVL solution.

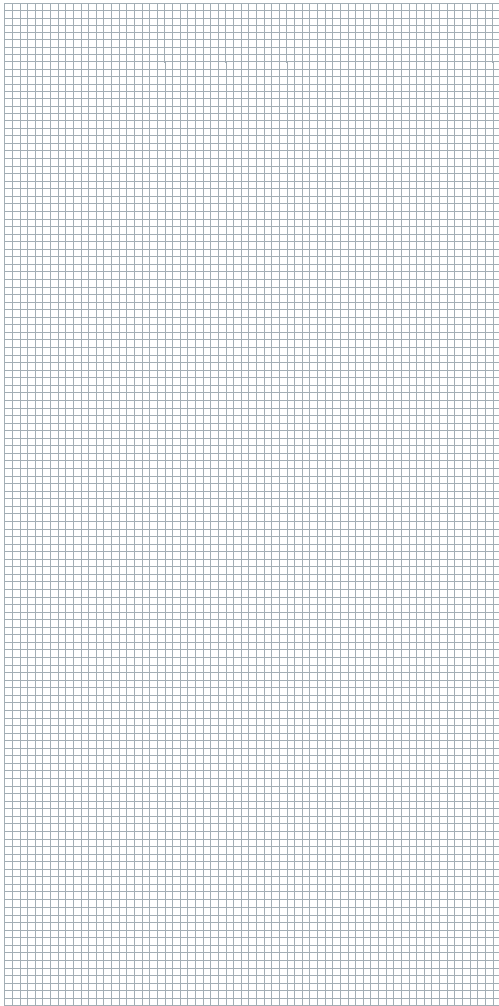

All values quoted are typical. Specifications are subject to change without notice and shall not form part of any contract. They are issued for guidance purposes only. Some features are enabled but can depend on network deployed. * Please note that not all frequency bands and power outputs are available in all markets. For further information please check with your nearest Tait authorised dealer or at www.taitworld.com.

The word Tait and the Tait logo are trademarks of Tait Electronics Ltd. Tait is an ISO9001: 2000 and ISO 14001: 2004 certified supplier.

AUTHORISED DEALER

TM8110 & TM8115 Specifications

General

	Band	Operational Frequency	Transmit Power*											
VHF	A4	66-88MHz	25W											
	B1	136-174MHz	25W											
	B1	136-174MHz	50W											
	C0	174-225MHz	25W											
	D1	216-266MHz	25W											
UHF	H5	400-470MHz	25W											
	H5	400-470MHz	40W											
	H6	450-530MHz	25W											
	H7	450-520MHz	40W											
700/800MHz	K5	<table border="1"> <thead> <tr> <th>Transmit</th> <th>Receive</th> <th></th> </tr> </thead> <tbody> <tr> <td>762-776MHz</td> <td>762-776MHz</td> <td>35W (>806MHz)</td> </tr> <tr> <td>792-825MHz</td> <td></td> <td>30W (<806MHz)</td> </tr> <tr> <td>850-870MHz</td> <td>850-870MHz</td> <td></td> </tr> </tbody> </table>	Transmit	Receive		762-776MHz	762-776MHz	35W (>806MHz)	792-825MHz		30W (<806MHz)	850-870MHz	850-870MHz	
Transmit	Receive													
762-776MHz	762-776MHz	35W (>806MHz)												
792-825MHz		30W (<806MHz)												
850-870MHz	850-870MHz													
Frequency Stability	±1.5ppm													
Channel/Network Capacity	TM8110: 10 Channels (simplex or semi-duplex) TM8115: 100 Channels (simplex or semi-duplex)													
Power Supply	10.8-16VDC													
Channel Spacing	12.5/20/25kHz													
Channel Increment	7.5/12.5/15/20/25/30kHz													
Dimensions (DxWxH)	25W: 175 x 160 x 51mm (6.9 x 6.3 x 2.0in) 30/35/40/50W: 195 x 160 x 51mm (7.7 x 6.3 x 2.0in)													
Weight	25W: 1.3kg (45.9oz) 30/35/40/50W: 1.5kg (53oz)													
Operational Temperature	-30°C to +60°C (-22°F to +140°F)													
Sealing	IP54													
RF Connector	50 ohm BNC or Mini UHF													
Interface Connectors	3 Interface Connectors with Serial Ports													
Internal Speaker Output	>3W													

Military Standards 810 F*

Applicable MIL-STD	Method	Procedure
Low Pressure	500.4	2
High Temperature	501.4	1, 2
Low Temperature	502.4	1, 2
Temperature Shock	503.4	1
Solar Radiation	505.4	1
Rain	506.4	3
Humidity	507.4	1
Salt Fog	509.4	1
Dust	510.4	1
Vibration	514.5	1
Shock	516.5	1, 6

* ALSO MEETS EQUIVALENT SUPERSEDED MIL-STD 810 C, D & E.

Transmitter

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Output Power	25W, 12W, 5W, 1W	30W, 15W, 5W, 2W 35W, 15W, 5W, 2W
Modulation Limiting	±2.5kHz ±4kHz ±5kHz	±2.5kHz ±4kHz ±5kHz
FM Hum and Noise	12.5kHz: -38dB 20kHz: -41dB 25kHz: -43dB	-33dB -38dB -40dB
Conducted/Radiated Emissions	-36dBm < 1GHz -30dBm > 1GHz	< -30dBm to 8GHz
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or pre-emphasised	Flat or pre-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation
Transmit Rise Time	10ms	10ms
Duty Cycle	25W: 33% 30/35W: 20% 40/50W: 20%	20%

Receiver

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Sensitivity	< -118dBm (0.28µV) for 12dB SINAD	-120dBm (0.22µV) for 12dB SINAD < -116dBm (0.35µV) for 20dB SINAD
Intermodulation	75dB	82dB
Selectivity	12.5kHz: 65dB 20kHz: 70dB 25kHz: 75dB	67dB 75dB 79dB
Spurious Responses	75dB	> 90dB**
Hum and Noise	12.5kHz: -40dB 20kHz: -41dB 25kHz: -43dB	-44dB -47dB -48dB
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or de-emphasised	Flat or de-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation

**Meets class A except 1/2 IF at bottom 4MHz of 700MHz sub-band (69dB) and TOP 4MHz of 800MHz sub-band (66dB).