



TP8100

SPECIFICATIONS



TP8110 TP8115/35 TP8120/40

TP8100 TRUNKED AND CONVENTIONAL PORTABLE RADIOS

Uncompromising build quality and sleek mechanical design make this reliable and waterproof portable radio ideal for situations when only the toughest will do. Available in either trunked or conventional, the TP8100 is sure to suit as a standalone portable or within a wider system solution.

Tough, reliable and waterproof

- Tough enough to withstand the harshest environments; engineered to exceed IP67 sealing: zero dust ingress and immersible in one metre of water for 30 minutes
- Light and easy to carry: only 344 grams with Li-Ion battery
- Top-mounted, easy-to-find programmable emergency key, along with Man Down and Lone Worker capabilities, improve worker safety
- Up to 350 conventional channels with CTCSS/DCS, Selcall, Two Tone Decode (Type 99), MDC1200, G-Star (Encode) and voting/scanning
- Trunked MPT features include multiple call types: individual/group/PABX/interfleet and short data messages, including MPT Talker Identification
- Swipe contacts, battery-only or battery-on-radio charging, desktop fast chargers provide efficient battery management
- Ease of programming enables efficient and rapid customisation
- All models are available with red, yellow or orange front panels, in addition to the standard black.

Engineered to be tough

Exceeds MIL-STD 810 C, D, E and F and rated waterproof to IP67, delivering communications you can trust.

High quality manufacture

Two-shot moulded construction lengthens product life and lowers cost of ownership.

Superb mechanical design

Ergonomic design contributes to a positive user experience.

Messaging capabilities

Stay in touch with 16 character user defined messages (TP8120/TP8140) or predefined status messaging on all display models.

Long shift life

Powerful Li-Ion battery comes as standard delivering over eleven hours shift life. An optional high performance 2500mAh Li-Ion battery is available.

Comprehensive accessory suite


Complement your Tait radio with a range of high performance accessories.

Voice security

Secure your voice communications with software voice inversion as standard or the high security encryption options board.

Worker Safety

Man Down, Lone Worker and Intrinsically Safe capabilities offer peace of mind for workers in isolated or hazardous situations.

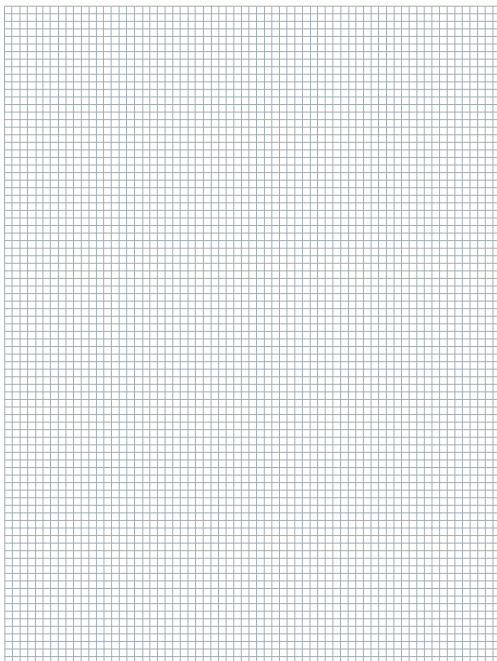

ISO 9001
ISO 14001

All measurements conducted using EN 300 086-1 testing method except those marked † which use TIA-603-C testing method.

Tait is your complete supplier of radio communications equipment offering mobile, portable and infrastructure solutions. Tait is renowned for its flexibility, responsiveness and commitment to producing innovative world-class mobile radio communications products.

Specifications are subject to change without notice and shall not form part of any contract. They are issued for guidance purposes only. Please note that not all frequency bands and power outputs are available in all markets.

The word Tait and the Tait logo are trademarks of Tait Electronics Ltd. Tait is an ISO 9001 and ISO 14001 certified supplier.

AUTHORISED DEALER

TP8100 Specifications

General

Frequency range	VHF 136-174MHz 174-225MHz	UHF 350-400MHz 400-470MHz 450-530MHz	806-870MHz 896-941MHz
Frequency increments	2.5kHz, 5kHz, 6.25kHz	5kHz, 6.25kHz	
Channel Spacing	12.5kHz, 20kHz, 25kHz	12.5kHz, 20kHz, 25kHz	
Frequency Stability	±2ppm (-30°C to 60°C/-22°F to 140°F)		
Signalling Format	Conventional Trunked		
Presets	CTCSS/DCS, Two Tone Encode (Type 99), Selcall, MDC1200, G-Star (Encode) MPT 1327, CTCSS, DCS (Tx only)		
Operational Temperature	-30° to 60°C (-22° to 140°F)		
Sealing	IP67		
	Conventional TP8110 16 channels TP8115 128 channels TP8120 350 channels	Trunked TP8135 100 Alphanumeric Presets TP8140 100 Alphanumeric Presets	

Military Standards 810 F*

Applicable MIL-STD	Method	Procedure
Low Pressure	500.4	2
High Temperature	501.4	1, 2
Low Temperature	502.4	1, 2
Temperature Shock	503.4	1
Solar Radiation	505.4	1
Rain	506.4	1, 3
Humidity	507.4	1
Salt Fog	509.4	1
Dust	510.4	1
Vibration	514.5	1
Shock	516.5	1, 4

* ALSO MEETS EQUIVALENT SUPERSEDED MIL-STD 810 C, D & E.

User Interface

	with Li-Ion 2000mAh battery	with Li-Ion 2500mAh battery
Dimensions (WxHxD)	61 x 130 x 40mm (2.4 x 5.12 x 1.57in)	61 x 130 x 45mm (2.4 x 5.12 x 1.77in)
Weight	344g (12.13oz)	365g (12.87oz)
Interfaces	Menu driven user interface 24 character LCD display Three programmable function keys - includes emergency button Two rubber knobs (volume and channel selection) Side-mounted accessory connector Large Push-to-Talk button Stainless steel antenna connector	

Transmitter

	136-174MHz	174-225MHz	350-400MHz	400-470MHz
RF Output Power	5W, 2.5W, 1W	5W, 2.5W, 1W	4W, 2.5W, 1W	4W, 2.5W, 1W
Modulation Limiting	12.5/20/25 channel			
FM Hum and Noise	12.5/20/25kHz channel	12.5/20/25kHz channel	12.5/20/25kHz channel	12.5/20/25kHz channel
Conducted Emissions	-39dBm (<1GHz) -46dBm (>1GHz)	-46dBm -40dBm	-46.0dBm -40.0dBm	-40.6dBm -40.0dBm
Audio Response	+0.5, -2.5dB	+0.5, -2.5dB	+0.5, -2.5dB	+0.5, -2.5dB
Audio Distortion at 1kHz with 60% modulation	0.3%	0.3%	0.6%	0.5%
RF Output Power	450-530MHz 4W, 2.5W, 1W			
Modulation Limiting	12.5/20/25kHz channel			
FM Hum and Noise	12.5/20/25kHz channel	12.5/20/25kHz channel	12.5/20/25kHz channel	12.5/20/25kHz channel
Conducted Emissions	-39dBm -40.0dBm	-33dBm [†] -33dBm [†]	-33dBm [†] -33dBm [†]	-33dBm [†] -33dBm [†]
Audio Response	+0.5, -2.5dB	+0.5, -2.5dB [†]	+0.5, -2.5dB [†]	+0.5, -2.5dB [†]
Audio Distortion at 1kHz with 60% modulation	0.5%	0.5% [†]	0.5% [†]	0.5% [†]
Duty Cycle (all bands)	1min Tx, 4min Rx (20%)			

Receiver

	136-174MHz	174-225MHz	350-400MHz	400-470MHz
Sensitivity	(20dB Phospho) -113.5/-117.0/ -117.0dBm	(20dB Phospho) -115.2/-116.6/ -118dBm	(20dB Phospho) -116.2/-118.5/ -119.3dBm	(20dB Phospho) -115.5/-117.8/ -118.4dBm
Intermodulation Rejection	NB/MB/WB			
Adjacent Channel Selectivity	12.5/20/25kHz channel			
Spurious Response Rejection	NB/WB channel			
FM Hum and Noise	12.5/20/25kHz channel			
Audio Response	12.5/20/25kHz channel			
Audio Distortion at 1kHz with 60% modulation	12.5/20/25kHz channel			
Sensitivity	NB/MB/WB (NB/WB)			
Intermodulation Rejection	NB/MB/WB			
Adjacent Channel Selectivity	12.5/20/25kHz channel			
Spurious Response Rejection	NB/WB channel			
FM Hum and Noise	12.5/20/25kHz channel			
Audio Response	12.5/20/25kHz channel			
Audio Distortion at Rated Audio	12.5/20/25kHz channel			

Battery and Charger

Battery	Li-Ion 2000mAh Li-Ion 2500mAh Li-Ion 2000mAh Intrinsically Safe**	Shift life [5/5/90] > 11 hours Shift life [5/5/90] > 14 hours Shift life [5/5/90] > 11 hours
Charger options	Desktop fast charger Multi-way charger	

**Must be used on an Intrinsically Safe TP8100 portable and is Factory Mutual approved. Please see the TP8100 Intrinsically Safe Specification Sheet for details.